



POLIMASTER®



Innovating Radiation Detection Technologies Since 1992

MULTIPURPOSE HAND-HELD RADIATION MONITOR/IDENTIFIER PM1401K-3M




PM1401K-3 is designed for detection and localization of radioactive materials by registration of photon (gamma and X-ray), alpha, beta and neutron radiation. The device can accumulate gamma spectra, identify radioactive isotopes, measure radionuclide specific activity and photon dose equivalent rate, as well as determine level of surface contamination with alpha and beta particles.

These are the smallest and the most light-weight instruments in the world which is capable to operate simultaneously as an alarming device, search instrument, survey meter, spectrometer and identifier.

Identification results appear on a bright, easily read color LCD display. Belt clip and ability to automatic mode of operation make device convenient to use.

All detectors are built into one lightweight and compact case. Shock and water resistant case ensures IP65 class environmental protection.

PM1401K-3M is equipped with alpha, beta and gamma detectors.

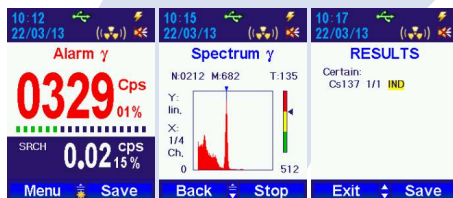

Applications

- Customs and border control
- Radiological and isotope laboratories
- Emergency services
- First responders
- Police and security
- Various industry branches where nuclear technical units and ionizing radiation sources are used

Features

- Detect, search and locate alpha, beta, gamma and X-ray radiation sources
- Measure levels of contaminated surfaces with alpha and beta irradiating sources
- Measure precisely dose rate
- Measure radionuclide specific activity in samples
- Alert users of the presence of radiation sources via audible and vibration alarms
- Record and store more than 10 000 events and 1000 gamma spectra in its non-volatile memory
- Transmit all of the recorded data to PC via USB
- Built-in GPS
- Bright, color LCD display

ALARM

LOCATION

MEASUREMENT

IDENTIFICATION




www.polimaster.com

www.polimaster.us

www.polimaster.eu

www.polimaster.jp



MULTIPURPOSE HAND-HELD RADIATION MONITOR/IDENTIFIER PMT401K-3M

GAMMA SEARCH, SPECTROMETRY AND ACTIVITY CHANNEL

Detector	CsI(Tl)
Sensitivity on ^{137}Cs , no less than on ^{241}Am , no less than	200 $\text{s}^{-1}/(\mu\text{Sv/h})$ or 2.0 $\text{s}^{-1}/(\mu\text{R/h})$ 200 $\text{s}^{-1}/(\mu\text{Sv/h})$ or 2.0 $\text{s}^{-1}/(\mu\text{R/h})$
Gamma radiation scintillation spectra acquisition channels	1024
Coefficient n setting range, (the number of mean square deviations of background)	1.0 – 9.9
Maximum quantity of scintillation spectra saved in the instrument memory	1000
Relative intrinsic error of transformation characteristic (integral nonlinearity) when acquiring scintillation spectra	$\leq 1.0\%$
Accuracy of ^{137}Cs nuclide activity measurement (A – measured activity value, Bq/kg)	$\pm (30+2000/A)\%$
Measuring range of specific activity on ^{137}Cs	100 Bq/kg - 100 000 Bq/kg (Bq/l)

MEASURING GAMMA CHANNEL

Detector	GM-counter
Dose equivalent rate measurement range (DER)	0.1 $\mu\text{Sv/h}$ - 100 mSv/h (10 $\mu\text{R/h}$ – 10 R/h)
Gamma radiation DER measurement energy range	0.015 - 15 MeV
Energy response relative to 0.662 MeV (^{137}Cs) in the photon radiation measuring mode, no more: -within the energy range from 0.015 up to 0.045 MeV -within the energy range from 0.045 up to 15.0 MeV	$\pm 40\%$ $\pm 30\%$
Accuracy of DER measurement (where H is the DER value in mSv/h)	$\pm (15 + 0.0015/H)\%$

MEASURING ALPHA AND BETA CHANNEL

Detector	GM-counter
Alpha-flux density measurement range	from 15 to $10^5 \text{ min}^{-1}\text{cm}^{-2}$
The minimal detectable alpha-flux density	from $2 \text{ min}^{-1}\text{cm}^{-2}$
Accuracy error of measurement of the alpha-flux density on ^{239}Pu (where ϕ - the measured density of alpha-flux in $\text{min}^{-1}\text{cm}^{-2}$, A - coefficient equal to $450 \text{ min}^{-1}\text{cm}^{-2}$)	$\pm (20 + A/\phi)\%$
Beta-flux density measurement range	from 6.0 to $10^5 \text{ min}^{-1}\text{cm}^{-2}$
Accuracy of measurement of beta-particles within the range on $^{90}\text{Sr}+^{90}\text{Y}$ (where ϕ - the measured density of beta-flux in $\text{min}^{-1}\text{cm}^{-2}$, A - coefficient equal to $60 \text{ min}^{-1}\text{cm}^{-2}$)	$\pm (20 + A/\phi)\%$

GENERAL SPECIFICATIONS

Standards compliance (designed to meet)	ANSI N42.33-2006, ANSI 42.34-2006, IEC 62327:2006, ANSI N42.42:2012
Alarms	visual, audible, external vibration
Data transfer communication channels	USB
Battery lifetime to	300 hours
Battery	2 x AA
Protection degree	IP65
Weight, no more	820 g
Dimensions	262x60x65 mm



Quality management system
ISO 9001

- Customer focus
- Customer satisfaction
- Continuous improvement
- System/process effectiveness

ID 15 100 148764

www.tuev-thueringen.de

America

Polimaster Inc.
44873 Falcon Place, Suite 128
Sterling, VA 20166, USA
Phone: +1 703 525 5075
Fax: +1 703 525 5079
info@polimaster.us
www.polimaster.us

Europe, Asia, Africa, Australia and Oceania

Polimaster Europe UAB
Ezero g. 4, Didziasalio k.
Nemezio sen., Vilniaus r.
LT-13264 Republic of Lithuania
phone: +370 5 210 2323
fax: +370 5 210 2324
polimaster@polimaster.eu
www.polimaster.com

Japan

Polimaster Japan Co., Ltd.
AUBE2 5-177 Kuratsuki
Kanazawa, Ishikawa Prefecture
920-8203 Japan
phone: +81 076 201 8623
fax: +81 076 201 8624
pacific@polimaster.jp
www.polimaster.jp